


GARAGING


Garages must be designed so that they can be used for the parking of cars (rather than for storage), reducing the demand for on-street parking. The typical garage should have minimum internal dimensions of 3.0m wide by 6.0m long. A minimum door width of 2.4m should be provided.

A forecourt length of 5.5m allows for the garage door to be opened whilst a car is parked in the space in front of it. If no parking space is to be provided in front of the garage, the garage should be set back a minimum of 0.50m from the public highway to allow for the door opening.

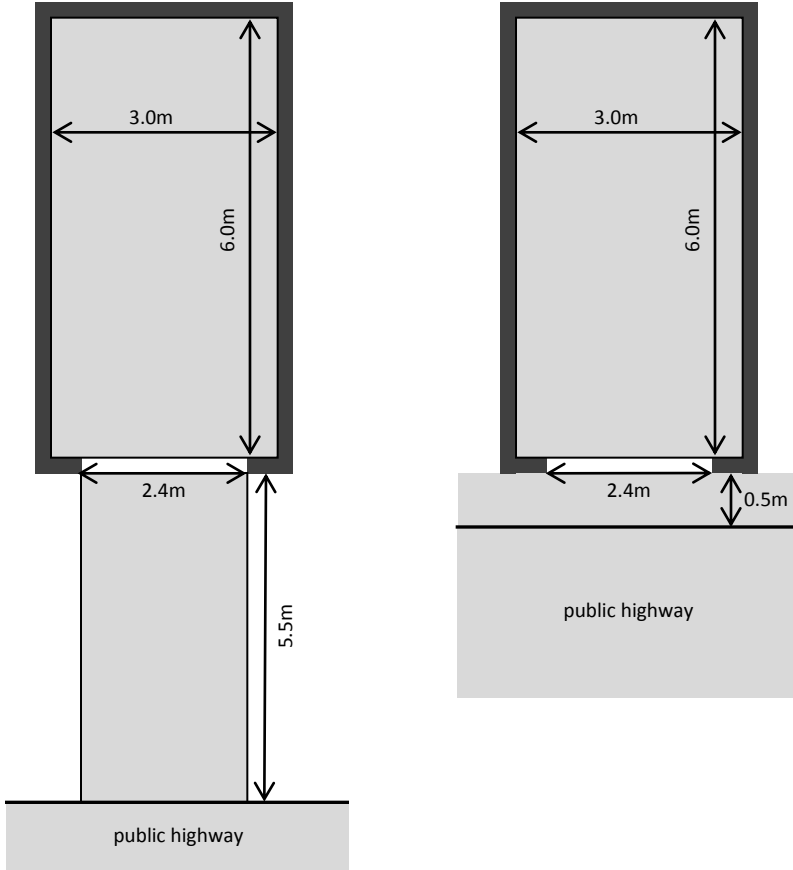

GARAGE FORECOURT DIMENSIONS

A forecourt depth of 6.8m should be provided in front of a single row of garages when it is possible for vehicles to overhang the adjacent footway or verge for at least 0.5m.

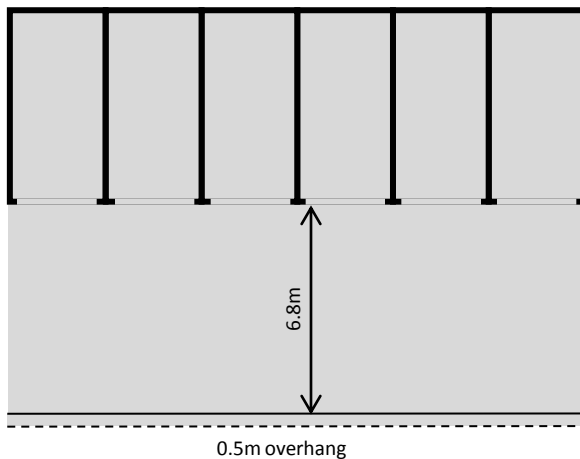

DOUBLE GARAGE DIMENSIONS

The typical double garage should have minimum internal dimensions of 5.6m wide by 6.0m long.

